


# MEYER HYDROSTATIC SHOP TEST UNIT

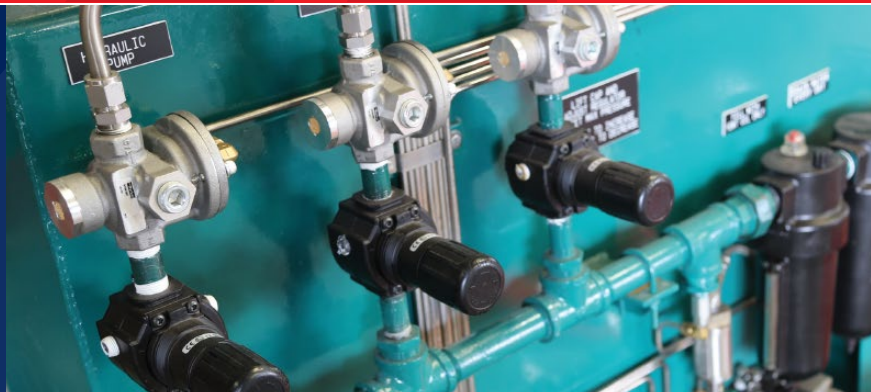

## Standard Features

- Electric motor power: explosion proof or industrial
- Dual air motors
- 60:1 higher volume and pressures up to 5,000 psi
- 200:1 Secondary pump pressure up to 20,000 psi
- 30,000 psi auto clamp fittings
- 30,000 psi gauge
- 20,000 chart recorder

## Options

- Triplex pumps for higher volume and faster testing
- 30,000 psi secondary pump
- Electric motor
- Diesel motor
- Gas motor
- Remote panel allows pump to remain in test booth while the operator remains safely outside



- Hydraulic system allows valves to be functioned from test stand - single station or multi station available
- Air actuated remote bleeder valve to purge system
- Digital pressure readouts
- 10 micron stainless steel filter housing filters supply and return fluid

